


DESUPERHEATER




- Fixed or Variable Area Desuperheater can be supplied together with cooling water injection control valve and pressure reducing steam control valve to give to the customer a complete pressure and temperature control loop as best solution.
- Pressure and temperature transmitters can be supplied on request.

DESUPERHEATER

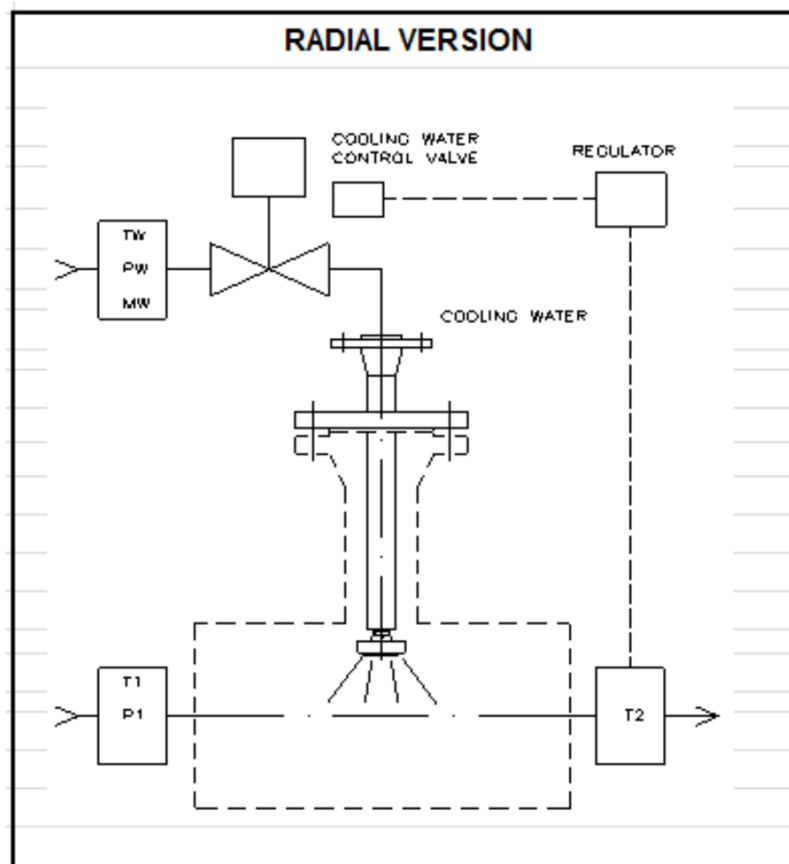

DESUPERHEATER

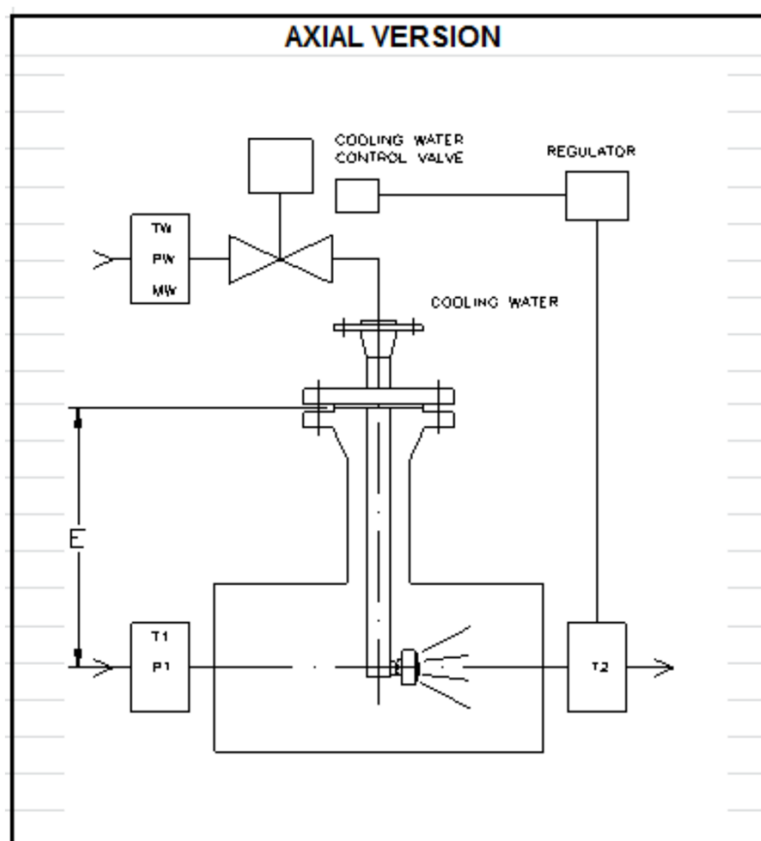

Data needed

OPERATING CONDITIONS	MIN	MAX	DESIGN
STEAM INLET			
(Upstream pressure reducing valve, if any)			
Flow [kg/h]			
Pressure [bar abs]			
Temperature [°C]			
Design: XX barg @ XXX °C			
STEAM OUTLET			
Flow [kg/h]			
Pressure [bar abs]			
Temperature [°C]			
Design: XX barg @ XXX °C			
WATER			
Pressure bar abs			
Temperature °C			
Design: XX barg @ XXX °C			